



SLOTS:- 10 WIDE x 25 LG
(TYP 10 PLACES)

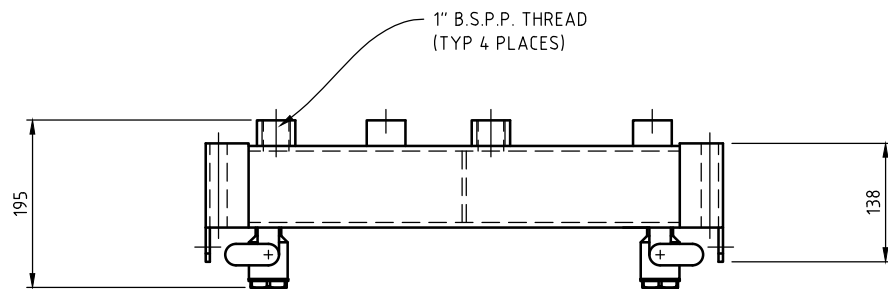

BYPASS VALVE HOUSING
c/w 5 BAR PR VALVE
(TYP 2 PLACES)

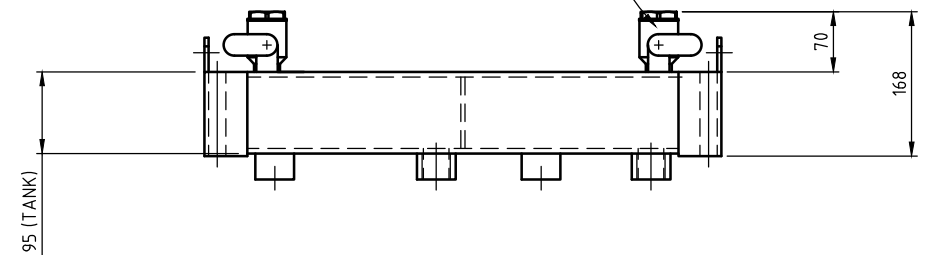


NOTES:

1. ALL DIMENSIONS IN mm UNLESS OTHERWISE NOTED.
2. OPERATING / TEST PRESSURE:- 20 BAR / 30 BAR.

(OEM 5045270)

| 5 | | | | |
|-----------|-------------|----|-----|------|
| 4 | | | | |
| 3 | | | | |
| 2 | | | | |
| 1 | | | | |
| No | DESCRIPTION | BY | CHD | DATE |
| REVISIONS | | | | |

THIS DOCUMENT IS THE PROPERTY OF GHT - AUSTRALIA P/L. NO EXPLOITATION OR TRANSFER OF ANY INFORMATION CONTAINED HEREIN IS PERMITTED WITHOUT THE WRITTEN CONSENT OF GHT - AUSTRALIA P/L.



GLOBAL HEAT TRANSFER AUSTRALIA P/L

DRAWN: W.Y.W.
DATE: 18-8-2022

CHECKED:

MATERIAL: ALUMINIUM

TITLE:
SANDVIK LH517i UNDERGROUND LOADER
TWIN HYD OIL COOLER c/w BYPASS VALVES
ARRANGEMENT - (600 x 602 x 95)

| | | | |
|-----------------------|-------------------|-------------------------------------|-----------------|
| SCALE 1:6.5 | SIZE A3 | DWG No AO/41/LH517i-600HT | REV 0 |
|-----------------------|-------------------|-------------------------------------|-----------------|